


Wall Mount Bracket

R.F. Mote Wall Mount Brackets, tapped #10-32 and accomodates for 19" mounting.

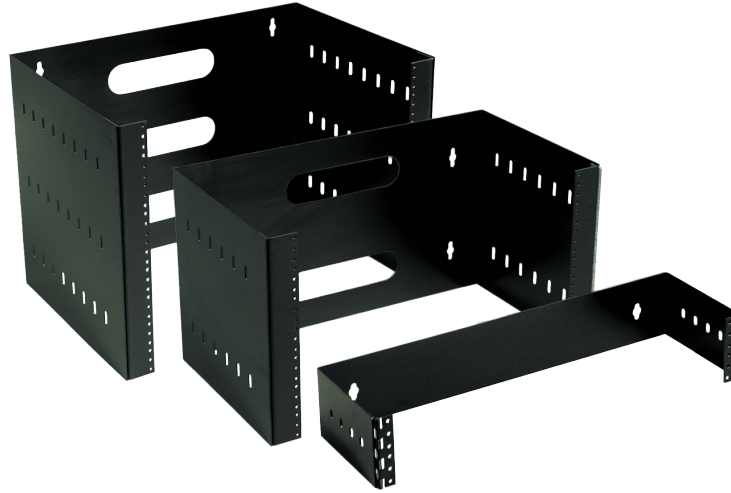

KEY FEATURES

- Heavy gauge steel
- Rails are tapped #10-32 to EIA standard
- Standard 19" mounting
- Cable tie slots provided in side walls
- Durable textured powder coated finish
- Rails are wet painted to avoid clogged threads
- Access slots provided in rear face

Wall Mount Bracket							
Part Number	Note	Height	Depth	Width	U's	Fixed Weight Capacity (LBS.)**	Swing Weight Capacity (LBS.)**
RFM-1904-WMB	NON-HINGED	7.00	6.00	21.50	4U	100	N/A
RFM-1906-WMB*	NON-HINGED	10.50	9.00 ~ 15.00	21.50	6U	125	N/A
RFM-1906-WMB-22*	NON-HINGED	10.50	16.00 ~ 22.00	21.50	6U	125	N/A
RFM-1909-WMB*	NON-HINGED	15.75	9.00 ~ 15.00	21.50	9U	125	N/A
RFM-1911-WMB-22*	NON-HINGED	19.25	16.00 ~ 22.00	21.50	11U	125	N/A
RFM-1902-HWMB	HINGED	3.50	6.00	19.75	2U	80	4
RFM-1906-HWMB	HINGED	10.50	9.00 ~ 15.00	21.50	6U	125	6
RFM-1906-HWMB-22*	HINGED	10.50	16.00 ~ 22.00	21.50	6U	125	4
RFM-1909-HWMB*	HINGED	15.75	9.00 ~ 15.00	21.50	9U	125	8
RFM-1911-HWMB-22*	HINGED	19.25	16.00 ~ 22.00	21.50	11U	125	8

* Adjustable depth

** Weight distributed evenly